


**STAINLESS STEEL
NIPPLE & COUPLING ENDS
PROPORTIONAL SAFETY VALVE**



DN	do	Di	De	X	Y	A	H
15 / 15	15	G 1/2"	G 1/2"	50	40	180	220
20 / 20	15	G 3/4"	G 3/4"	55	45	180	225
25 / 25	17	G 1"	G 1"	65	60	205	265
32 / 32	22	G 1 1/4"	G 1 1/4"	80	65	215	280
40 / 40	27	G 1 1/2"	G 1 1/2"	85	70	280	350
50 / 50	34	G 2"	G 2"	100	85	285	370

Set Pressure Range : 0.1 - 6 bar (2 - 87 psi)

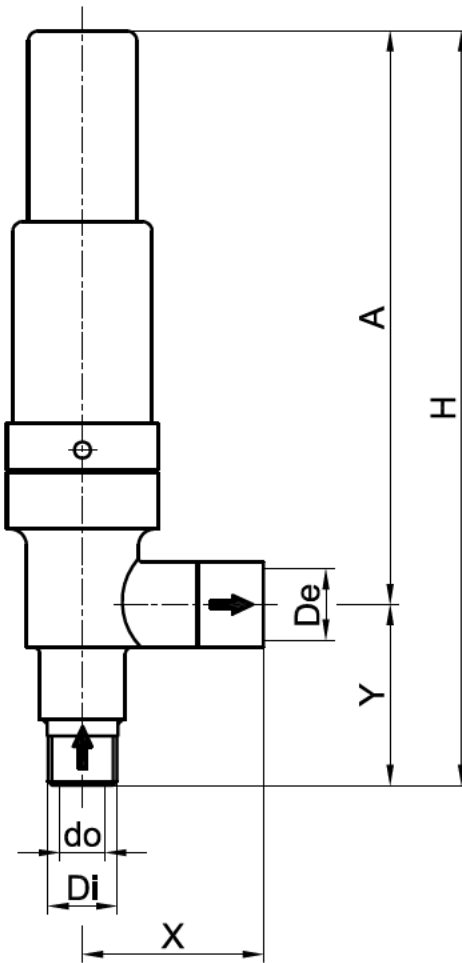

ALFANOX