

Hegtdatos karima DIN 2633 (PN 16)



Szabványok:


DIN 2500 "Karimák" (általános adatok)

DIN 2501 "Karimák" (csatlakozó méretek)

DIN 2519 "Acélkarimák" (műszaki szállítási feltételek)

DIN 2526 "Karimák" (tömítőfelület kialakítások)

Anyagok: RSt 37-2, C22.8, 15Mo3, 13CroMo44, 10CroMo910, 1.4541, 1.4571

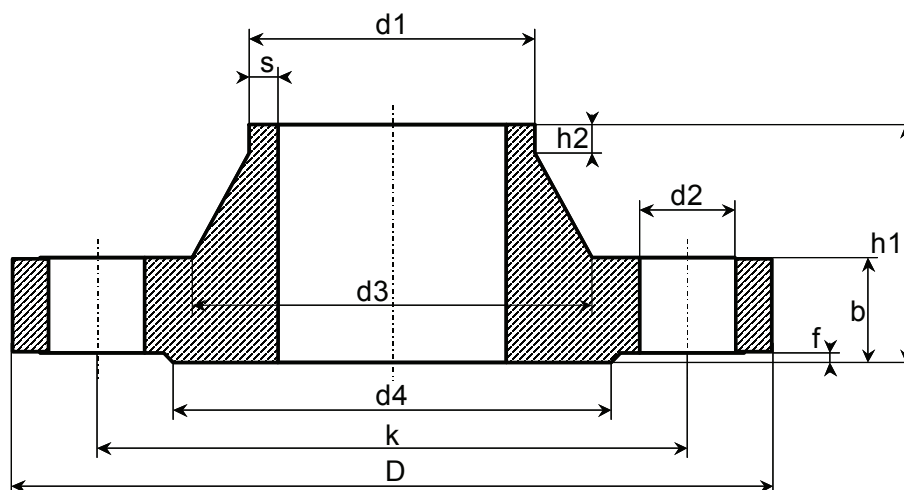

Néveleges nyomás PN 16

DN	d1	D	b	k	h1	d3	s	h2	d4	f	d2	Csavarok	Súly/kg
10	14,0	90	14	60	35	25	1,8	6	40	2	14	4	0,580
10	17,2	90	14	60	35	28	1,8	6	40	2	14	4	0,580
15	20,0	95	14	65	35	30	2,0	6	45	2	14	4	0,648
15	21,3	95	14	65	35	32	2,0	6	45	2	14	4	0,648
20	25,0	105	16	75	38	38	2,3	6	58	2	14	4	0,952
20	26,9	105	16	75	38	40	2,3	6	58	2	14	4	0,952
25	30,0	115	16	85	38	42	2,6	6	68	2	14	4	1,140
25	33,7	115	16	85	38	45	2,6	6	68	2	14	4	1,140
32	38,0	140	16	100	40	52	2,6	6	78	2	18	4	1,690
32	42,4	140	16	100	40	56	2,6	6	78	2	18	4	1,690
40	44,5	150	16	110	42	60	2,6	7	88	3	18	4	1,860
40	48,3	150	16	110	42	64	2,6	7	88	3	18	4	1,860
50	57,0	165	18	125	45	72	2,9	8	102	3	18	4	2,530
50	60,3	165	18	125	45	75	2,9	8	102	3	18	4	2,530
65	76,1	185	18	145	45	90	2,9	10	122	3	18	4	3,060
80	88,9	200	20	160	50	105	3,2	10	138	3	18	8	3,700
100	108,0	220	20	180	52	125	3,6	12	158	3	18	8	4,620
100	114,3	220	20	180	52	131	3,6	12	158	3	18	8	4,620