


mamelons

séries 3000 - 6000

Filetage et taraudage suivant
ANSI B 1.20.1 - 1983

Thread according to
ANSI B 1.20.1 - 1983

A sur plat
A/F Hex.

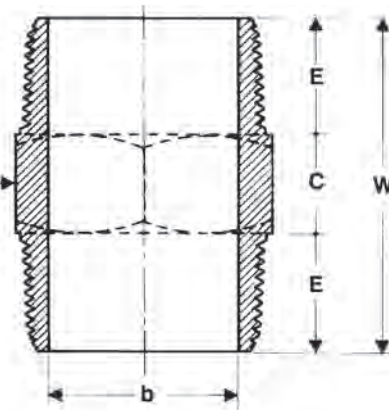

hexagonal nipples

class 3000 lb - 6000 lb

Dimensions suivant
BS 3799 - 1974

Dimensions according to
BS 3799 - 1974

Diamètres nominaux Nominal pipe sizes		A (mini)		E (mini)		C (mini)		W (mini)		B*			
										3000		6000	
pouces inches	mm mm	mm	inc.	mm	inc.	mm	inc.	mm	inc.	mm	inc.	mm	inc.
1/8	6	11	0.43	10	0.39	6	0.24	26	1.02	5	0.20	2	0.08
1/4	8	15	0.59	15	0.59	6	0.24	36	1.42	8	0.31	6	0.24
3/8	10	18	0.71	16	0.63	8	0.31	40	1.57	11	0.43	8	0.31
1/2	15	22	0.87	20	0.79	8	0.31	48	1.89	14	0.55	11	0.43
3/4	20	27	1.06	21	0.83	10	0.39	52	2.05	19	0.75	13	0.51
1	25	35	1.38	25	0.98	10	0.39	60	2.36	24	0.94	17	0.67
1 1/2	40	50	1.97	26	1.02	16	0.63	68	2.68	38	1.50	30	1.18
2	50	62	2.44	27	1.06	17	0.67	71	2.80	49	1.93	39	1.54


bossages à souder

séries 3000 - 6000

Taraudage suivant
ANSI B 1.20.1 - 1983


Thread according to
ANSI B 1.20.1 - 1983

De 1/4" à 2" O=9,5 mm
From 1/4" to 2" O=0.375 in

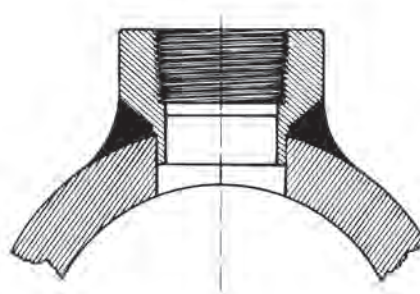

welding bosses

class 3000 lb - 6000 lb

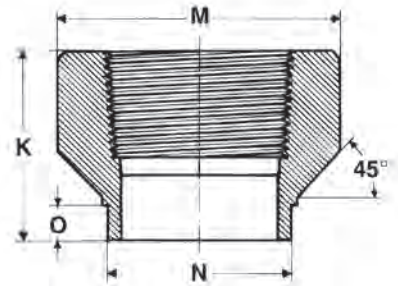

Diamètre nominal Nominal pipe size	3000 - 6000					
	K (1)		M (1)		N (1)	
	mm	inches	mm	inches	mm	inches
1/4	30	1,18	28,0	1,10	14,0	0,55
3/8	30	1,18	32,0	1,26	17,4	0,69
1/2	33,5	1,32	38,0	1,50	21,6	0,85
3/4	35,5	1,40	45	1,77	26,9	1,06
1	43,0	1,69	63	2,48	33,6	1,32
1 1/4	48,0	1,89	68	2,68	42,4	1,67
1 1/2	51,0	2,00	76	3,00	48,5	1,91
2	57,5	2,26	95	3,74	60,9	2,40