


| Performance Specification |  |                  |     |     |  |
|---------------------------|--|------------------|-----|-----|--|
| Pressure                  |  | 1.6              |     |     |  |
| Test Pressure             |  | Strength Test    | 1.5 | Mpa |  |
|                           |  | Seal Test        | 1.1 |     |  |
|                           |  | Air Seal Test    | 0.6 |     |  |
| Working Temperature       |  | -20 ~ +180 C°    |     |     |  |
| Medium Application        |  | Corrosion medium |     |     |  |

Technical Specification

1. Flang standard: HG/T 20592
2. Inspection and testing GB/T 13927

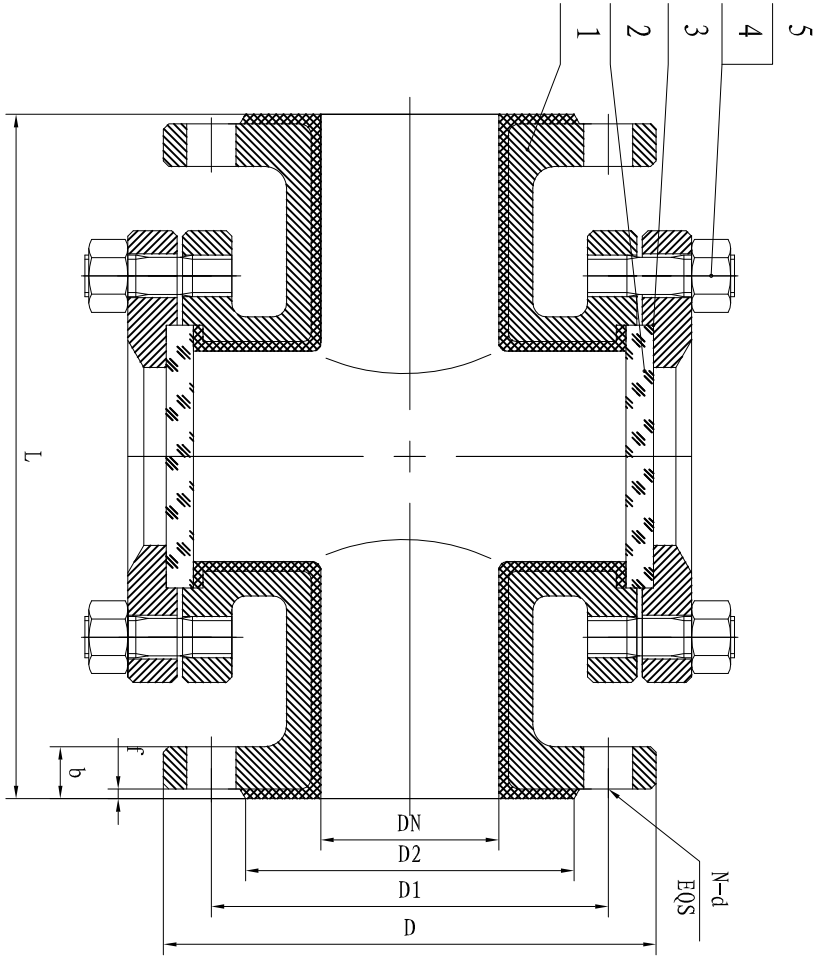

| DN  | L   | D   | D1  | D2  | f   | b    | z-φ | d  |
|-----|-----|-----|-----|-----|-----|------|-----|----|
| 15  | 200 | 95  | 65  | 45  | 3   | 14   | 4-φ | 14 |
| 20  | 200 | 105 | 75  | 55  | 3   | 12   | 4-φ | 14 |
| 25  | 200 | 115 | 85  | 65  | 3   | 13   | 4-φ | 14 |
| 32  | 200 | 140 | 100 | 78  | 3.5 | 13   | 4-φ | 18 |
| 40  | 250 | 150 | 110 | 85  | 3.5 | 14   | 4-φ | 18 |
| 50  | 250 | 165 | 125 | 100 | 3.5 | 15.5 | 4-φ | 18 |
| 65  | 250 | 185 | 145 | 120 | 3.5 | 16   | 4-φ | 18 |
| 80  | 280 | 200 | 160 | 135 | 3.5 | 17   | 8-φ | 18 |
| 100 | 280 | 220 | 180 | 155 | 4   | 20   | 8-φ | 18 |

|     |       |              |
|-----|-------|--------------|
| 5   | bolt  | SS304        |
| 4   | Nut   | SS304        |
| 3   | clamp | WCB          |
| 2   | glass | Borosilicate |
| 1   | body  | WCB/PFA      |
| NO. | NAME  | MATERIAL     |

|         |  |                    |  |
|---------|--|--------------------|--|
| WCB/PFA |  | YFM VALVE CO., LTD |  |
|         |  |                    |  |
|         |  | Horizontal type    |  |
|         |  | sight glass        |  |
|         |  | 2:1                |  |