



Szalai és Társa Kft.
1992

N16F1-GSC



SIGHT GLASS



APPLICATION :

Chemical and pharmaceutical, petrochemical industries, industry, etc.

GENERAL CHARACTERISTICS :

Range: DN 15 to DN 200

CARBON STEEL GSC (WCB)

Borosilicate

Gasket PTFE

STANDARDS :

Manufacture according to ISO 9001 : 2008.

Directive 97/23/EC

NP-16 Flanges RF according to EN12092-1


Length according to EN 558 series 1

WORKING CONDITIONS :

Maximum Working Pressure : 16 bar.

Maximum Working Temperature : -20 °C / +180 °C.

Room Temperature : -20 °C / +60 °C.

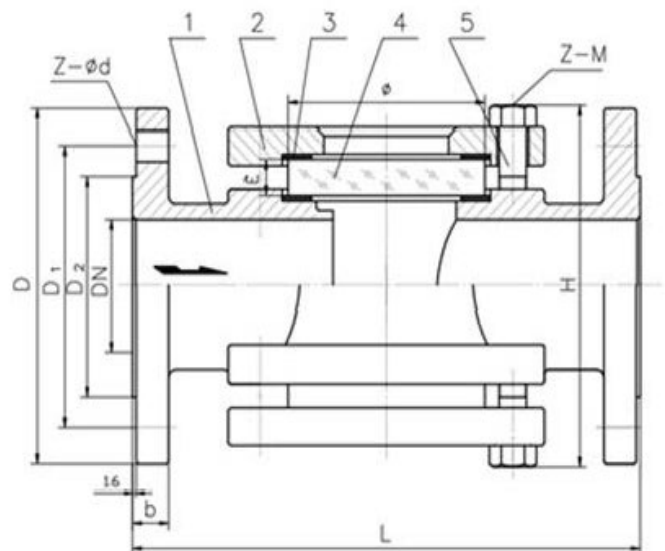

MATERIALS:

No.	Part	Material
1	Body	CARBON STEEL GSC
2	Caps	CARBON STEEL GSC
3	Flat Gasket	PTFE
4	Glass	Borosilicate
5	Bolt	CARBON STEEL GSC

DIMENSIONS :

DN	ØD	ØD1	Ød	Z	L	b	H	Glass
15	95	65	14	4	130	14	72	50X10
20	105	75	14	4	150	16	82	60X10
25	115	85	14	4	160	16	92	65X12
32	140	100	18	4	180	18	105	75X12
40	150	110	18	4	200	18	115	85X12
50	165	125	18	4	230	20	140	95X15
65	185	145	18	4	290	20	160	115X18
80	200	160	18	8	210	22	190	135X20
100	220	180	18	8	350	22	220	160X20
125	250	210	18	8	400	22	225	190X25
150	285	240	22	8	480	24	247	230X30
200	340	295	22	12	600	24	315	280X35

fax: (1) 260 2607
tel: (1) 433 3914

warehouse: 2360 Gyál, Bánki Donát utca 28.
office: 1108 Budapest, Venyige utca 3.

e-mail: szalaikft@szalaikft.hu
web: www.szalaikft.hu