



Szalai és Társa Kft.
1992

VDM2-64BSP-316

BALL VALVE



APPLICATION :

Chemical and pharmaceutical industries

GENERAL CHARACTERISTICS :

Size DN- 1/4" to 2"

Full Bore.

Anti blow-out stem

PTFE filled with 15% Glass fiber.

Direct Mounting Pad: ISO 5211.

Lock Washer.

Locking device.

STANDARDS :

Manufacture according to ISO 9001 : 2015

Directive 2014/68/EU

Pressure Tests according to API 598.

Female cylindrical BSP threaded ends according to ISO 7/1 (EN 10226-1).




WORKING CONDITIONS :

Maximum Working Pressure : 63 bar.

Maximum Working Temperature : -25 °C / +180 °C.

MATERIALS:

No.	Part	Material
1	Body	S Steel A351 CF8M
2	Ends	S Steel A351 CF8M
3	Ball	S Steel 316
4	Stem	S Steel 316
5	Seat	PTFE + 15% FV
6	Body seal	PTFE + 15% FV
7	Washer	PTFE + Graphite
8	O ring	FKM
9	Packing	PTFE
10	Gland	S Steel 304
11	Bellville washer	S Steel 301
12	Stem nut	S Steel 304
13	Washer	S Steel 304
14	Stop	S Steel 304
15	Handle	S Steel 304
16	Handle cover	PVC plastic
17	Handle nut	S Steel 304

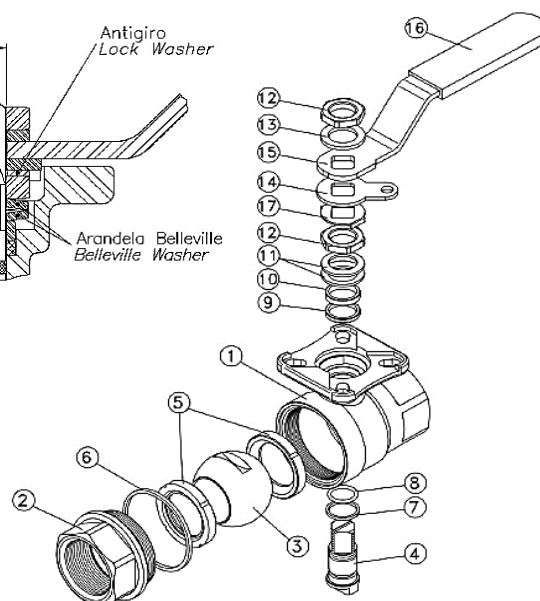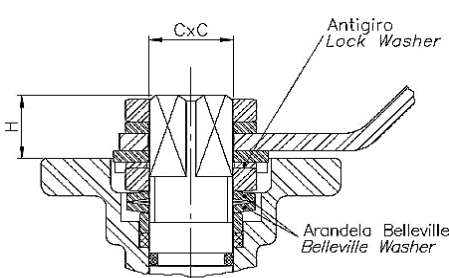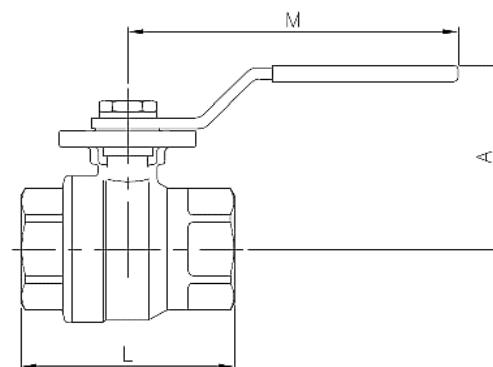

DIMENSIONS :

DN	A	CxC	H	L	ISO 5211	Par (Nm)	Kv	Weight
1/4"	62	9	10	50	F03	5	6	0,3
3/8"	62	9	10	50	F03	4	10	0,3
1/2"	63	9	11	55	F03	4	24	0,35
3/4"	70	11	11	70,5	F03/F04	8	43	0,56
1"	70	11	11	83	F04/F05	10	83	0,78
1 1/4"	88	14	15	91	F04/F05	14	130	1,35
1 1/2"	94	14	15	103	F05/F07	20	205	1,9
2"	100	14	15	120	F05/F07	30	340	2,83

fax: (1) 260 2607
tel: (1) 433 3914

warehouse: 2360 Gyál, Bánki Donát utca 28.
office: 1108 Budapest, Venyige utca 3.

e-mail: szalaikft@szalaikft.hu
web: www.szalaikft.hu