




# Balflex® Fuel Hose

## Balflex® Fuel Hose – 10.1211.

According to **DIN 73379**

### Low pressure, steel reinforced fuel line hose

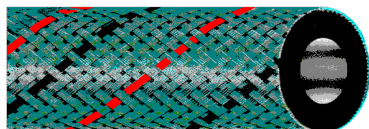

**Inner tube:** seamless nitrile rubber N216, resistant to oil

**Outer tube:** 1 external galvanized steel braid AISI 1008

**Safety factor:** 5:1

**Application:** automobile fuel lines, oil, gasoil and oil emulsion cooling water

**Temperature range:** - 10°C (+ 14°F) + 70°C (+ 158°F)

part number	Ø nom	dash size	Ø internal		Ø external		working pressure		min. burst pressure		min. bend radius		weight
			mm	inch	mm	inch	MPa	PSI	MPa	PSI	mm	inch	
10.1211.04	3/16"	- 4	4,0	0.16	10,0	0.39	1,5	220	7,5	1090	30	1.2	0,17
10.1211.06	1/4"	- 6	6,0	0.24	11,0	0.43	1,5	220	7,5	1090	30	1.2	0,22
10.1211.08	5/16"	- 8	8,0	0.31	13,0	0.50	1,5	220	7,5	1090	40	1.6	0,26
10.1211.10	3/8"	- 10	10,0	0.39	15,0	0.59	1,5	220	7,5	1090	45	1.8	0,33
10.1211.12	1/2"	- 12	13,0	0.51	19,0	0.71	1,5	220	7,5	1090	50	2.0	0,50
10.1211.16	5/8"	- 16	16,0	0.63	22,0	0.87	1,0	145	6,0	870	70	2.8	0,56
10.1211.20	3/4"	- 20	20,0	0.79	25,0	0.98	1,0	145	5,0	725	80	3.1	0,62
10.1211.25	1"	- 25	25,0	1.00	32,0	1.26	1,0	145	4,5	650	100	3.9	0,71

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

**Balflex® – The European Technology**