

Fig no. V-158B Full Bore
1/4" ~ 4" DN 8 - DN 100



Features :

Investment Casting Component
Blow out proof stem, ISO 5211 Direct mounting type
In-line Maintenance
For Chemical, Industrial Application
Carbon Steel or Super Alloy upon request

Standard Compliance :

Body wall thickness : EN 12516-1/2/3
Butt Weld : B16.25
Face to Face : MD's standard
Body material : EN1503-1
Pressure testing : EN 12266

Specification :




End connection : Butt weld end
Working Pressure : 63bar (CWP) for DN8- 50
40 bar (CWP) for DN65-100
Temperature : -20 to 180°C

Option :

F to F Length : DIN 3202 S13

MATERIALS LIST

NO.	PART NAME	MATERIAL
1	BODY	1,4408/EN1503-1
4	BALL	ASTM A351 Gr.CF8M
5	STEM	SS316
9	END CAP	1,4408/EN1503-1
12	SEAT	RTFE.
13	THRUST WASHER	RTFE.
14	STEM PACKING	RTFE.
15	GLAND BUSH	SS304
19	HANDLE	SS304
21	HANDLE COVER	PLASTIC
22	STEM NUT	SS304
24	HANDLE NUT	SS304
28	LOCKING PAD	SS304
29	BELLEVILLE WASHER	SS304-CSP
30	TAB WASHER	SS304
31	O-RING	VITON
32	PACKING FOLLWER	PTFE,+25%GF
35	BODY BOLT	SS304
36	BOLT WASHER	SS304
37	BOLT NUT	SS304

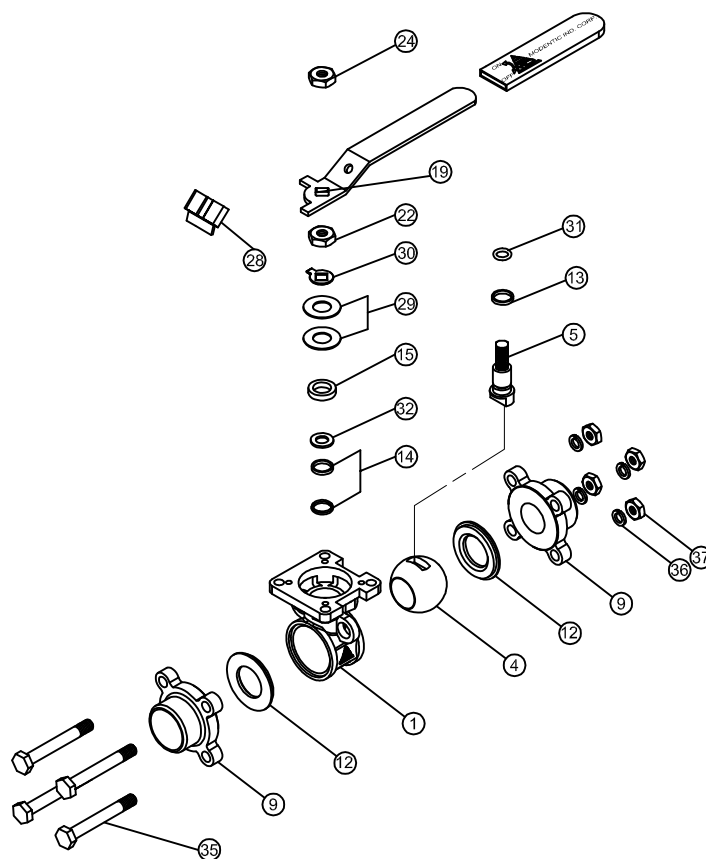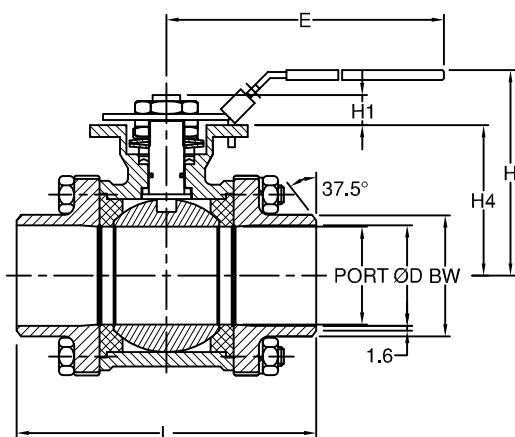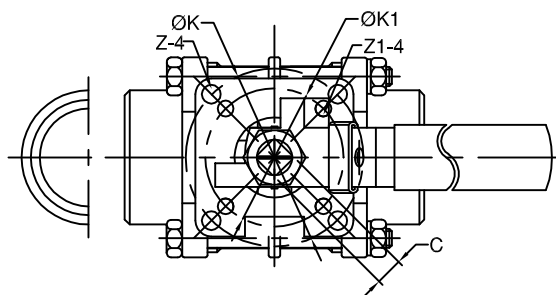

DIMENSIONS

unit:mm

	SIZE	PORT	ØD	L	E	H	H1	H4	C	ØK	ØK1	Z-4	Z1-4	BW	
	DN8	1/4"	11.0	11.0	63.5	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	13.7
	DN10	3/8"	12.5	12.5	63.5	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	17.1
	DN15	1/2"	15.0	15.8	63.5	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	21.3
	DN20	3/4"	20.0	20.9	72.5	112.0	80.8	8.5	45.0	9.0	50.0	36.0	7.0	6.0	26.7
	DN25	1"	25.0	26.6	81.0	136.0	90.5	11.4	53.5	9.0	50.0	36.0	7.0	6.0	33.4
	DN32	1-1/4"	32.0	35.1	94.5	185.0	98.7	11.4	59.0	9.0	50.0	36.0	7.0	6.0	42.2
	DN40	1-1/2"	38.1	40.9	108.0	197.9	115.3	14.0	74.8	14.0	70.0	50.0	9.0	7.0	48.3
	DN50	2"	50.0	52.5	121.5	197.9	124.0	13.7	83.5	14.0	70.0	50.0	9.0	7.0	60.3
	DN65	2-1/2"	62.7	62.7	157.5	267.0	155.0	18.0	108.8	17.0	102.0	70.0	11.0	9.0	73.0
	DN80	3"	77.9	77.9	190.0	267.0	208.5	18.0	118.3	17.0	102.0	70.0	11.0	9.0	88.9
	DN100	4"	100.0	102.3	225.0	322.0	216.7	18.0	153.8	17.0	102.0	70.0	11.0	9.0	114.3