




Szalai és Társa Kft.
1992

GE-LR

Straight male stud couplings



APPLICATION : Straight male stud coupling, male thread BSPP with sealing edge Form B, light duty series

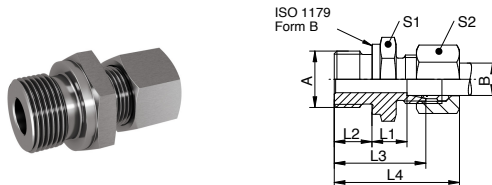

DIMENSIONS :

A	B	PN / bar	L1 / mm	L2 / mm	L3 / mm	L4 / mm	S1	S2
G1/8	6	315	8,5	8	23,5	33,5	14	14
G1/4	6	315	10	12	29	39	19	14
G3/8	6	315	11,5	12	30,5	40,5	22	14
G1/2	6	315	12	14	33	43	27	14
G1/8	8	315	8,5	8	24,5	34,5	14	17
G1/4	8	315	10	12	29	39	19	17
G3/8	8	315	11,5	12	30,5	40,5	22	17
G1/2	8	315	12	14	33	43	27	17
G1/8	10	315	10,5	8	25,5	36,5	17	19
G1/4	10	315	11	12	30	41	19	19
G3/8	10	315	12,5	12	31,5	42,5	22	19
G1/2	10	315	13	14	34	45	27	19
G1/8	12	315	11,5	8	26,5	37,5	19	22
G1/4	12	315	12	12	31	42	19	22
G3/8	12	315	12,5	12	31,5	42,5	22	22
G1/2	12	315	13	14	34	45	27	22
G3/4	12	315	14	16	37	48	32	22
G1/4	15	315	13,5	12	32,5	43,5	24	27
G3/8	15	315	13,5	12	32,5	43,5	24	27
G1/2	15	315	14	14	35	46	27	27
G3/4	15	315	15	16	38	49	32	27
G1	15	315	16	18	41	52	41	27
G3/8	18	315	14	12	33,5	45,5	27	32
G1/2	18	315	14,5	14	36	48	27	32
G3/4	18	315	14,5	16	38	50	32	32
G1	18	315	15,5	18	41	53	41	32
G3/8	22	160	18	12	37,5	49,5	32	36
G1/2	22	160	16,5	14	38	50	32	36
G3/4	22	160	16,5	16	40	52	32	36
G1	22	160	17,5	18	43	55	41	36
G1/2	28	160	17,5	14	39	53	41	41
G3/4	28	160	17,5	16	41	55	41	41
G1	28	160	17,5	18	43	57	41	41
G1 1/4	28	160	18,5	20	46	60	50	41
G1	35	160	17,5	18	46	62	46	50
G1 1/4	35	160	17,5	20	48	64	50	50
G1 1/2	35	160	19,5	22	52	68	55	50
G1 1/4	42	160	19	20	50	66	55	60
G1 1/2	42	160	19	22	52	68	55	60