




Szalai és Társa Kft.
1992

PTFE Lined Metal Expansion Joints KOMP1006-SS/PTFE

DN25-200/PN10-16



PTFE lined expansion bellows combine the high-pressure rating of a metallic expansion joint with the high temperature and near-universal corrosion resistance of PTFE. They are designed for services where the unreinforced PTFE bellows is unsuitable.

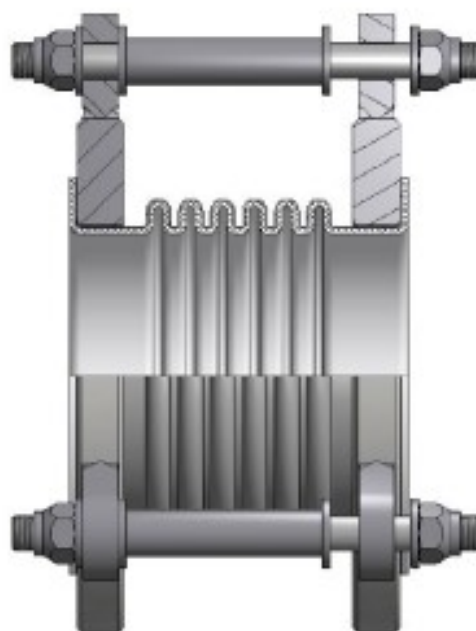

Technical data sheet

ITEMS	DN32	DN65	DN100	DN125	DN150	DN200
Bellows	6	6	6	6	6	6
Total length	140	180	200	220	250	200
Flange outside	140	185	220	250	285	340
Flange inside	100	145	180	210	240	295
Flange holes	4	4	8	8	8	12
Axial extension/compression	10	10	12	12	15	15
Lateral movement	8	8	10	10	12	12
Liner layer	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
Bellows material	AISI 304	AISI 304	AISI 304	AISI 304	AISI 304	AISI 304
Flange material	AISI 304	AISI 304	AISI 304	AISI 304	AISI 304	AISI 304
Supporting rod accessory	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel

All dimensions are in mm

fax: (1) 260 2607
tel: (1) 433 3914

warehouse: 2360 Gyál, Bánki Donát utca 28.
office: 1108 Budapest, Venyige utca 3.

e-mail: szalaikft@szalaikft.hu
web: www.szalaikft.hu